


EPDM Flange Rubber Gasket

Comply to SS 270 & SS 375



Updated on: 2026.07.24

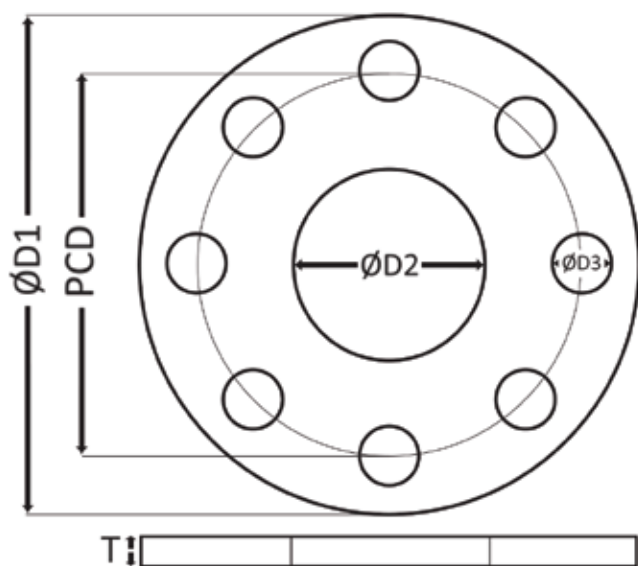

EPDM Gaskets for PN16 Flanges

SS270 & SS375 Certified


DN	Type	Material	ID (D2)	OD (D1)	No. of Holes	Hole Dia (D3)	PCD	Thickness (T) ±0.5
50	Full Faced	EPDM	50	165	4	19	125	4 mm
65	Full Faced	EPDM	65	185	4	18	145	3 mm
80	Full Faced	EPDM	80	200	8	18	160	4 mm
100	Full Faced	EPDM	100	220	8	18	180	4 mm
150	Full Faced	EPDM	150	285	8	22	240	4 mm
200	Full Faced	EPDM	200	340	12	22	295	4 mm
250	Full Faced	EPDM	250	400	12	26	355	4 mm
300	Full Faced	EPDM	300	455	12	26	410	4 mm
350	Full Faced	EPDM	356	520	16	26	470	3 mm
400	Full Faced	EPDM	407	580	16	30	525	3 mm
450	Full Faced	EPDM	458	640	20	30	585	3 mm
500	Full Faced	EPDM	508	715	20	33	650	3 mm
600	Full Faced	EPDM	610	840	20	36	770	3 mm
700	Full Faced	EPDM	712	910	24	36	840	3 mm
800	Full Faced	EPDM	813	1025	24	39	950	3 mm

*Note: Tolerances as per Class M2 C (Closure) ISO 3302
All dimensions are in mm*

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.

Address: 2 Benoi Crescent, Singapore 629969
Tel: +65 6027 9581 / +65 6027 9582 | **Fax:** +65 6261 5638
Email: sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
Web: www.chongcheong.com.sg






*Engineered Criss-Cross Texture
for better water leakage prevention.*



EPDM Flange Rubber Gasket

Ethylene propylene diene monomer (EPDM) rubber gaskets for use as elastomeric seals that is extremely durable. It is used to stop liquid leaks at fixed metal flange and other connectors. EPDM rubber gaskets provide reliable, long-term sealing in extreme weather conditions and over a wide range of temperatures. It can a pressure of 16 bar and has a working temperature range of -15 to 85 degrees Celsius. All rubber gaskets used to seal potable water systems adhere to the PUB's established standards and specifications.

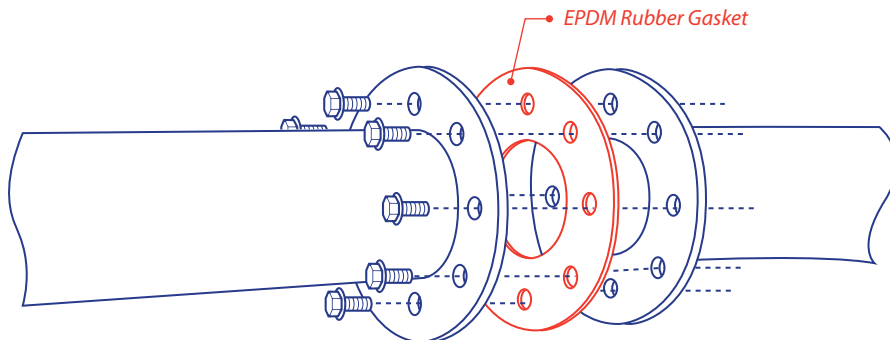

Pipe Flange Connection with Rubber Gasket

Key Benefits

- All products are pressure tested.
- Full and easy traceability with lot number and material.
- Clean and easy removal of gaskets - no sticking to the flanges.
- Stability in high and low temperatures.
- Compliant to PUB standards and requirements.

Material Properties

Colour:	Black
Composition:	EPDM Rubber
Temperature, Minimum:	-15°C
Maximum:	+85°C
Pressure, Maximum, bar:	16 bar

Available Sizes

Full Face Flange EPDM Rubber Gasket:
DN50 - DN800

Comply with SS270 & SS375

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.

Address:
Tel:
Email:
Web:

2 Benoi Crescent, Singapore 629969
+65 6027 9581 / +65 6027 9582 | **Fax:** +65 6261 5638
sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
www.chongcheong.com.sg



Our Custom Services



Welding




Sawing Machine



CNC Milling Machine



Pipe Threading

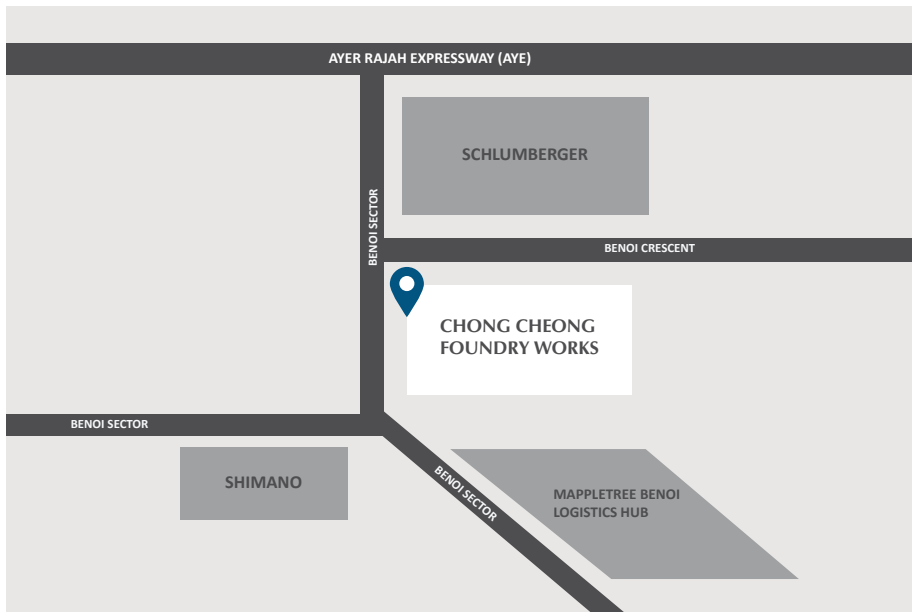

**CHONG CHEONG
FOUNDRY WORKS PTE LTD**

Contact Us

Please feel free to contact us via e-mail or phone. We will be glad to answer your questions, concerns and/or feedback.

Address:

2 Benoi Crescent
Singapore 629969

Operating Hour:

Mon - Fri: 8AM - 6.15PM
Sat: 8AM - 5PM
Sun & PH: Closed

Tel: +65 6027 9581 / +65 6027 9582
Fax: +65 6261 5638
Email: sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
Web: www.chongcheong.com.sg



Discover more on our website!