
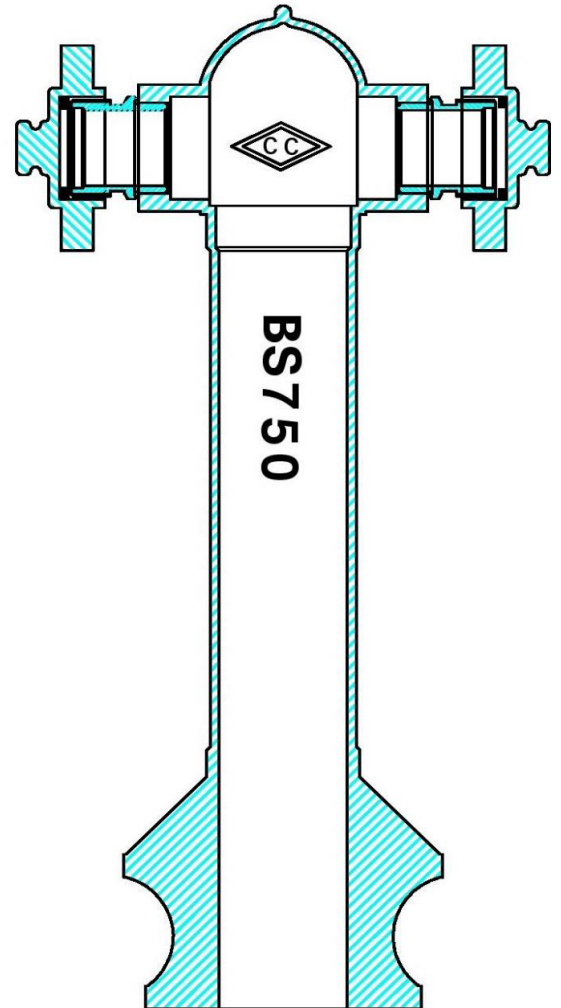


2-Way Hydrant Pillar

BS750

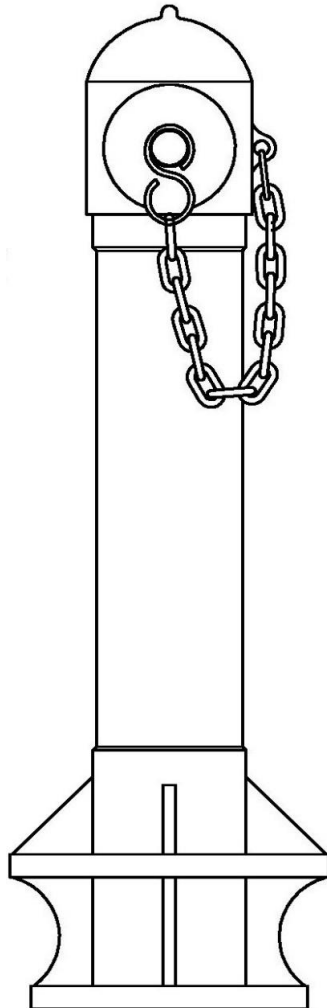

2-Way pillar hydrant are manufactured and tested to BS 750:2012; it is complete with $\varnothing 100\text{mm}$ PN16 flange drilled inlet and two numbers 2 1/2" LVT male thread outlets, chain and cap.

Specification

- Body material ductile iron
- Design pressure 16 bar
- Test pressure 24 bar

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.

Address:
Tel:
Email:
Web:

2 Benoi Crescent, Singapore 629969
+65 6027 9581 / +65 6027 9582 | **Fax:** +65 6261 5638
sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
www.chongcheong.com.sg

