Test Plugs

1 3”/80mm



2 4”/100mm



3 6”/150mm



4 8”/200mm



- Galvanised steel centre locking test plug with brass wing nut and brass cap
- Strong, durable rubber and steel construction
- Maximum back pressure 34kPa - 5 psi - 0.34 bar
- 3”/80mm ~ 6”/150mm size c/w 1/2” BSPP male thread bypass
- 8”/200mm size c/w 1” BSPP male thread bypass

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.


Address: 2 Benoi Crescent, Singapore 629969
Tel: +65 6027 9581 / +65 6027 9582 | Fax: +65 6261 5638
Email: sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
Web: www.chongcheong.com.sg


SOCOTEC ISO 9001
SAC Accredited Certification Body QS-1999-05

Test Plugs




80 - 150mm

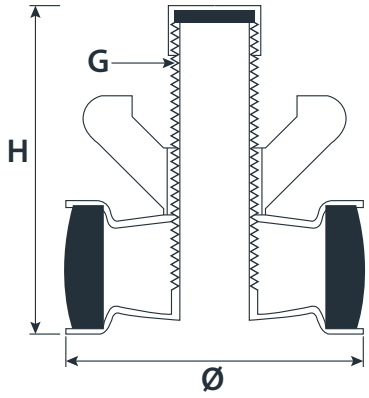

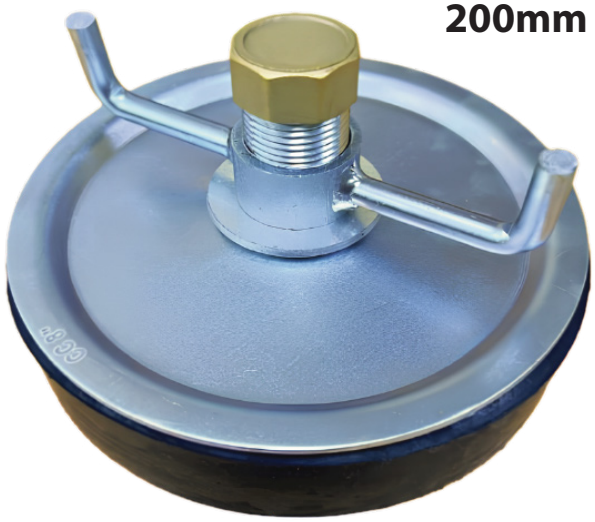

200mm

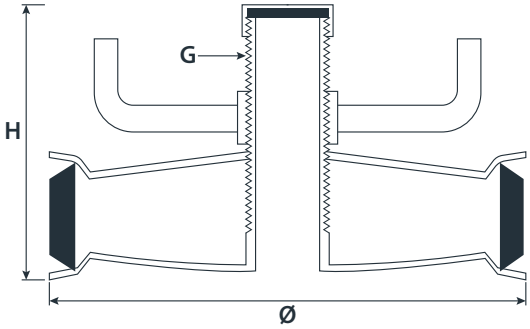

Standard Specifications

Size mm	G (inch)	H (mm)	Ø (mm)	Range Min/Max (mm)	Max Back Pressure (PSI)	Weight (kg)
80	½"	77	73	73-85	20	0.260
100	½"	77	93	94-110	10	0.340
150	½"	77	140	146-163	10	0.805
200	1"	77	190	191-211	7	1.800

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.

Address: 2 Benoi Crescent, Singapore 629969
Tel: +65 6027 9581 / +65 6027 9582 | Fax: +65 6261 5638
Email: sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
Web: www.chongcheong.com.sg

SOCOTEC ISO 9001
SAC Accredited Certification Body QS-1999-05