
Ductile Iron Gilbaut / Flexible / Mechanical Coupling





Main Features

- **Body material:** Ductile iron
- **Body coating:** Fusion Bonded Epoxy (FBE) RAL 5005 Signal Blue
  *250 microns average thickness with a minimum of 200 microns
- **Gasket:** EPDM Rubber
- **Bolt and Nut:** Steel 8.8 Galvanized
- **Working Pressure:** 16 bar

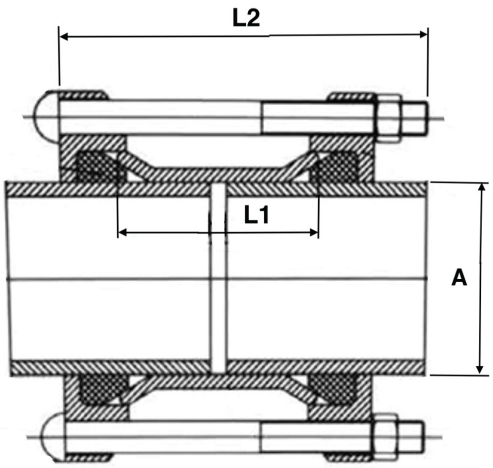

* Join Ductile iron pipe - plain end to plain end pipe.
* Other bigger sizes available upon request.

Size	Pipe OD (A) mm	Barrel Length (L1) mm	Bolts number, Diameter & Length (L2) mm
DN80	98	105	4-M12x170
DN100	118	105	4-M12x170
DN150	170	105	4-M12x180
DN200	222	105	6-M12x180
DN250	274	105	6-M12x180
DN300	326	105	6-M12x180

Designs, materials and specifications shown are subject to change without notice due to our continuing program of product development.

Address: 2 Benoi Crescent, Singapore 629969
Tel: +65 6027 9581 / +65 6027 9582 | Fax: +65 6261 5638
Email: sales@chongcheong.com.sg / sales.32@chongcheong.com.sg
Web: www.chongcheong.com.sg

SOCOTEC ISO 9001
SAC Accredited Certification Body QS-1999-05